(19) World Intellectual Property Organization International Burcau





(43) International Publication Date 18 January 2001 (18.01.2001)

PCT

(10) International Publication Number WO 01/04756 A1

(51) International Patent Classification?: G06F 11/14

(21) International Application Number: PCT/US00/19364

(22) International Filing Date: 14 July 2000 (14.07.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

60/143.743 14 July 1999 (14.07.1999) US 60/143.744 14 July 1999 (14.07.1999) US 09/610,738 6 July 2000 (06.07.2000) US

- (71) Applicant: COMMVAULT SYSTEMS, INC. [US/US]: 2 Crescent Place. Oceanport, NJ 07757-0900 (US).
- (72) Inventors: CRESCENTI, John; 1 Ivy Road, Freehold, NJ 07728 (US). KAVURJ, Srinivas; 40 Maple Court,

Highland Park, NJ 08904 (US). OSHINSKY, David, A.; 22 Francis Road. East Brunswick, NJ 08816 (US). PRAHLAD, Anand; 3 Bucknell Drive, East Brunswick, NJ 08816 (US).

- (74) Agent: BENNETT, James, D.: Akin. Gump. Strauss. Hauer & Feld, L.L.P. Suite 1900, 816 Congress Avenue. Austin, TX 78701 (US).
- (84) Designated States (regional): European patent (AT. BE. CH. CY. DE. DK. ES. FI, FR, GB, GR, IE, IT, LU, MC. NL, PT, SE).


Published:

With international search report.

Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

[Continued on next page]

(54) Title: MODULAR BACKUP AND RETRIEVAL SYSTEM USED IN CONJUNCTION WITH A STORAGE AREA NETWORK

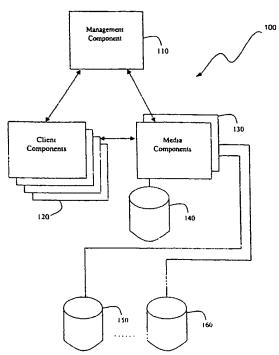

(57) Abstract: A modular computer storage system and method is provided for managing and directing data archiving functions, which is scaleable and comprehends various storage media as well as diverse operating systems on a plurality of client devices. A client component is associated with one or more client devices for generating archival request. A file processor directs one or more storage devices, through one or more media components, which control the actual

SEST AVAILABLE COPY



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

physical level backup on various storage devices. Each media component creates a library indexing system for locating stored data. A management component coordinates the archival functions between the various client components and the file processor, including setting scheduling policies, aging policies, index pruning policies, drive cleaning policies, configuration information, and keeping track of running and waiting jobs. The management component also keeps the scheduling information for a timetable of backups of the client devices and allocates storage space. The modular computer storage system may also work in conjunction with a Storage Area Network (SAN) to provide for the computing devices both file storage and backup functions through a network, such as a Local Area Network (LAN). Computing devices may be different types of machines running different operating systems and the backup media may also be diverse. The SAN acts as a virtual media device for centralizing a network file system for the computing devices proving for shared data as well as transparent storage for each computing device.

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

TITLE:

MODULAR BACKUP AND RETRIEVAL SYSTEM USED IN CONJUNCTION WITH A STORAGE AREA NETWORK

SPECIFICATION

CROSS-REFERENCE TO RELATED APPLICATION

This application claims the benefit of U.S. Provisional Patent Application Serial No. 60/143,743, filed July 14, 1999, and U.S. Provisional Patent Application Serial No. 60/143,744, filed July 14, 1999, and U.S. Utility Patent Application Serial No. ________, filed July 6, 2000.

INCORPORATION BY REFERENCE

This application hereby incorporates by reference, in its entirety, U.S. Provisional Patent Application Serial No. 60/143,743, filed July 14, 1999, and U.S. Provisional Patent Application Serial No. 60/143,744, filed July 14, 1999, and U.S. Utility Patent Application Serial No. _______, filed July 6, 2000.

BACKGROUND

1. Technical Field.

The present invention is directed towards backup systems for computer networks. In particular, the present invention is directed towards the implementation of a distributed, hierarchical backup system with a storage area network (SAN) system.

2. Related Art.

Conventional backup devices commonly employ a monolithic backup and retrieval system servicing a single server with attached storage devices. These systems usually control all aspects of a data backup or retrieval, including timing the backup, directing the files to be backed up, directing the mode of the archival request, and directing the storage process itself through attached library media. Further, these backup and retrieval systems are not scalable, and often direct only one type of backup and retrieval system, such as a network backup or a single machine backup.

Due to the monolithic structure of these backup and retrieval systems, a slight change in the operation of any one of the several functional aspects of the backup and retrieval system requires a large amount of effort to upgrade or change the backup and retrieval system, including in some situations, reinstalling the backup and retrieval system in its entirety.

Also, the operation of a backup and retrieval system across a network containing several different types of hardware and operating systems presents significant challenges to an enterprise scale backup including maintaining data coherency, bridging file system protocols, and accessibility issues across multiple hardware and operating system configurations.

Other currently available backup solutions do not address scalability issues, hierarchy issues, and the problems inherent in the storage of different files in a network file system. Many other problems and disadvantages of the prior art will become apparent to one skilled in the art after comparing such prior art with the present invention as described herein.

SUMMARY OF THE INVENTION

A file processor manages data transmission in a computer storage system. The file processor operates as a part of a computing system and may be implemented as programs running on a computational device. A management component module and at least one client component work in conjunction with the file processor for archival purposes such as archival requests. The client component may be implemented as a program running on a computing device. Archival requests include storing data such as a computer file in a location different then the original location of the data. Archival requests may also include retrieval of stored data and may include restoring data to a previous state such as retrieving earlier versions of a file. The computer storage system may be comprised of a media component and a client component that manage functions associated with a backup of a computer storage system.

Another aspect of the invention includes a modular network storage system in which a file processor directs the functions associated with the archival of data over a network. A plurality of backup devices, each having space for the archival of data are directed by a plurality of media components. Each media component is a part of a computing device and is communicatively coupled to one or more of the plurality of the backup devices and the file processor for controlling archival functions of the backup devices in accordance with the direction from the file processor. A plurality of client components each generate archival type requests to the file processor which then provide direction to the plurality of media components for directing the archival functions in accordance with the archival type requests.

The modular network storage system may include a management component that is communicatively coupled to the file processor and the plurality of client devices for coordinating archival functions where the management component is a part of a computing device such as a program running on a computer. The modular network storage system may include a plurality of client devices where each client component is communicatively coupled

to one or more of the plurality of client devices and the file processor for communicating the archival type requests from the client devices to the file processor. At least two of the plurality of client devices may run different operating systems. A network storage media may be communicatively coupled to two or more of the plurality of client devices over the network as well as the plurality of backup devices and at least one client device may include a local storage media, wherein the archival functions include reading data from either the network storage media or the local storage media and then writing the data to one of the plurality of backup devices.

A method of the present invention includes providing a file processor, which is communicatively coupled to at least one client component and a plurality of media components; providing a plurality of backup devices, each backup device has physical storage space for performing archival functions; coupling the plurality of media components communicatively with the plurality of backup devices, and with a file processor, wherein each of the media components control the archival functions of one or more backup devices; generating an archival type request, by the client component to the file processor; and directing, by the file processor through the plurality of media components, the backup devices to perform an archival function, in accordance with the archival type request.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a schematic block diagram of a modular backup and retrieval system built in accordance with principles according to the present invention.

Fig. 2 is a schematic block diagram of a modular backup system working in conjunction with a storage area network (\$AN) system according to principles of the present invention.

Fig. 3 is schematic block diagram of the interaction of the library media of Fig. 2 with the SAN system.

DETAILED DESCRIPTION OF THE DRAWINGS

Fig. 1 is a schematic block diagram of a modular backup system. A modular backup system 100 comprises three components, a management component 110, one or more client components 120, and one or more media components 130.

Typically, these three components, the management component 110, the client component 120, and the media component 130, may reside on several different machines. For example, the management component 110, the client component 120, and the media component 130 may all reside on a single computing device. Or, the management component 110 and one of the media components 130 may reside on a single computing device with the client component 120 residing on a different computing device. Or, the management component 110 and one of the client components 120 may reside on a single computing device with the media component 130 residing on a different computing device. Or, the media component 130 and the client component 120 may reside on the same computing device with the management component 110 residing on a different computing device. Or, the management component 110, the client component 120, and the media component 130 may all reside on different computing devices.

As shown in Fig. 1, the management component 110 is coupled to the client components 120 and the media components 130. The media components 130 are also coupled to the client components 120.

These components of the management component 110, the client component 120, and the media component 130 are typically software programs running on the respective computing devices. Although the computing devices may not be the same devices, communication should exist between these components, as is demonstrated.

The client component 120 controls the actions and parameters of a backup or retrieval for a particular client computing device. A client computing device is the computing device

in need of backup and retrieval assistance. The client components 120 each reside on a client computing device, or are in active communication with the client computing device. The particular client component 120 provides, for a particular client computing device, communication with a management director component 110 regarding such parameters as backup schedules, types of files in the backup schedule, the method of backup or retrieval, and other broad scope backup and retrieval management functions for the client computing device. The particular client component 120 communicates with a particular media component 130 responsible for the actual backup or retrieval function.

The media component 130 controls the actions and parameters of the actual physical level backup or retrieval at the library media containing the archived data. Each media component 130 is responsible for one or more physical backup media devices. As shown in Fig. 1, the media component 130 may be responsible for a single backup device 140, or for a plurality of backup devices 150 through 160. The particular media component 130 directs the data that is the subject of an archival type request to or from, as the case may be, the particular backup devices 140, 150, or 160 that it is responsible for. In the case of a retrieval type archival request, the particular media component 130 directs the retrieved data to a requesting client component 120.

The particular media component 130 also creates a library index for the data contained on the particular backup devices 140, 150, or 160 for which it is responsible for operating. Additionally, the particular media component 130 indexes the location of the archived data and files on the particular associated backup media devices 140, 150, or 160 that it is responsible for operating, and allows the management component 110 and the client component 120 access to certain information about the index entries. The media component 130 uses this library index to quickly and easily locate a particular backed up file or other piece of data on the physical devices at its disposal.

The particular media component 130 either resides on a computing device physically responsible for the operating the library media which the particular media component is responsible for, or it must be in active communication with that computing device. The media component also communicates with the management component 110, since the management component is responsible for the allocation of physical media for backup and retrieval purposes.

The backup devices 140, 150, and 160 can comprise many different types of media, such as massively parallel fast access magnetic media, tape jukebox media, or optical jukebox media devices. The determination of which backup device is to be implemented is determined by several parameters. These include time related frequency of accesses, importance of the backup file or data and urgency of its retrieval, or how long ago the backup was made.

The management component 110 directs many aspects of the backup and retrieval functions. These aspects include scheduling policies, aging policies, index pruning policies, drive cleaning policies, configuration information, keeping track of all running and waiting jobs, allocation of drives, type of backup (i.e. full. incremental, or differential), tracking different applications running on each client, and tracking media. The management component 110 may contain the scheduling information for a timetable of backups for the computing devices. Any number of computing devices might be involved, and the computing devices may be interconnected.

Fig. 2 is a schematic block diagram of a modular backup system working in conjunction with a storage area network (SAN) system 250. A computing device 200 contains and operates a management component 202, which is responsible for the coordination of backup, storage, retrieval, and restoration of files and data on a computer network system 290. The management component 202 coordinates the aspects of these

functions with a client component 212, running on another computing device 210, and a client component 222 running on yet another computing device 220. The computing device 220 also has an attached data storage device 214, to which it can store data and files locally.

The computing devices 210, 220, and 230 are connected to the SAN system 250 via a connection 264, such as a direct fiber channel connection, or a SCSI connection. However, it should be realized that any type of network connection is possible.

The SAN system 250 environment comprises the connection media 264, routers, and associated hubs for the actual data communication functions of the network, and a file processor 252. The elements of the SAN system 250 not explicitly numbered are implied in a remainder of the SAN system 250.

Another computing device 230 contains another client component 232. However, the computing device 230 is connected, through a network 270, to a file processor 252 for interaction with the SAN system 250 through another network 265. This network could be any type of network, such as a LAN operating under a TCP/IP protocol.

The client components 232, 222, or 212 coordinate and direct local backup and retrieval functions on the computing devices 230, 220, and 210, respectively. The management component 202 coordinates and directs the overall network backup of the computer network 290.

The computing devices 210, 220, and 230 can all be different architectures of machines running different operating systems. Hardware systems could include those made by SUN, Hewlett/Packard, Intel based families of processors, and machines based on the RS6000 and PowerPC families of processors, to name a few. Operating systems can include the many flavors of UNIX and UNIX-like operating systems, such as HP/UX, Solaris, AIX, and Linux, to name a few, as well as Windows NT by Microsoft.

The file processor 252 of the SAN system 250 contains a client component 262 and a media component 260. Storage media 257, 258, and 259 are communicatively coupled to the file processor 252 for storage of network files from the computing devices 210, 220, and 230. These storage devices can be magnetic media for fast retrieval, tape media for longer term storage, or optical media for much longer term storage.

The overall SAN system 250 acts as a block access device to the computing devices 210, 220, and 230. Thus, the overall SAN system 250 acts as a virtual media device and centralizes the network file system from the computing devices 210, 220, and 230. As such, true dynamic sharing of the data and files through the SAN system 250 is possible. These data and files are available to the computing devices 210, 220, and 230. The computing devices 210, 220, and 230 present their network file and data requests to the file processor 252 over the SAN network media 264 remainder of the SAN system 250 as they would any other storage media available to that computing device. The file processor 252, working in accordance with its software, interprets the data and file requests from the external computing devices. The file processor 252 then performs the file or data request based on the information it is given, and responds accordingly to the file or data request. The network file system is maintained and operated on solely by the file processor 252 of the SAN system 250. All accesses, writes, reads, and requests for information on any files and/or data under the network file system is handled by the SAN system 250, and in particular the file processor 252.

The file processor 252 keeps track of all the stored files and/or data stored on the media devices 257, 258, and 259. The file processor 252 maintains and presents a file system view of the stored data and/or files to the computing devices 210, 220, and 230 over the remainder of the SAN system 250 and the SAN network media 264. The computing devices 210, 220, and 230, when accessing or inquiring about portions of the network file system,

perform these functions by requesting them through the file processor 252 of the SAN system 250.

The SAN system 250 allows access to the files and/or data stored in its storage media, and actually performs all the function of a file system to the attached computing devices 210, 220, and 230. Opening, closing, reading, and writing of data to files and of files themselves actually look and perform like a normal file system to the attached computing devices 210, 220, and 230. These actions are transparent to the computing devices. As such, the SAN system 250 acts and performs as a file system to the rest of the computing devices connected to the file processor 252. Also, from the perspective of the computing devices, each computing device can access and view the data and/or files stored by the file processor 252 of the SAN system 250 as part of a large, monolithic file system.

A client component 262 and a media component 260 can be part of the SAN system 250. These components work in conjunction with other components present in the network environment, including the file processor 252 itself, to make up a network backup and retrieval system for the computer network 290.

In an embodiment of the present invention, the file processor 252 works in conjunction with the management component 202, the media component 260, and the client component 262 for archival type requests, such as those concerned with backup, retrieval, and restoration purposes. The media component 260 acts in conjunction with the management component 202 and/or the client component 262 in a backup and retrieval operation with regards to the network files as stored on the SAN 250.

The management component 202 could, for example, initiate a full backup of the network file system as stored and managed on the SAN system 250. This could be initiated through the network link 270 directly to the client component 262, bypassing the SAN link 264.

Or, the management component 202 could initiate the action through any of the computing devices 210, 220, or 230. This initiation may take place either in a direct request to the SAN system 250 or indirectly to the components 260 and 262 through such methods such as data encapsulation and data bridging. Or, the initiation could be a special file memory request to the SAN system 250, which the file processor 252 interprets to be a particular backup and retrieval instruction.

It may also be possible that the client component 262 requests the backup itself, independently of the media component 260. In either event the client component 262 would manage the functions associated during the backup with the host system, in this case the SAN system 250, such as determining the actual files or data to backup, the level of backup, and other such client machine specific determinations. The data and/or files that need to be backed up would be made available from the network file storage media 257, 258, and 259, wherein the client component 262 turns control over to the media component 260. The media component 260 would then direct the physical storage of the data and/or files on the network file system from the storage media 257, 258, or 259, as the case may be, and onto the library storage media 275. The media component 260 could then perform the indexing functions on the archived data and/or files.

It should be noted that the backup could take several forms. A backup could target data and files on a sector or block write basis, or could be used in a file basis.

In the case of an incremental backup, for example, only those blocks or files that have been altered would be stored for backup and retrieval purposes. In the case of a differential backup, only those changed blocks as contained within an altered file would be stored. Or, other criteria, such as file size, can be used to determine a hybrid backup strategy wherein both files and blocks are saved, depending on the criteria employed and the state of the data and/or files as they exist on the SAN system.

In a restore-type archival operation, a similar method would be employed. Either the media component 260 or the client component 262 may request a restore. In either case, the client component 262 would then perform the managerial tasks associated with the request, as described earlier. Control would then pass to the media component 260 to physically perform the extraction of the stored or archived data and/or files from the library media 275. The client component 262 would then forward the retrieved data and/or files to the requesting device.

Should the requesting device be the SAN system itself, the client component 262 would forward the retrieved data to the SAN system 250, wherein the SAN system 250 could write the data out to the appropriate storage media 257, 258, or 259.

Or, the client component 262 could forward the retrieved data and/or files to the management component 202, wherein the management component 202 routes the requested data and/or files to the particular computing device.

Alternately, the computing device 220 running the client component 222 may request a restore or other archival request for its attached memory media device 214 through the client component 222. The media component 260 could be contacted either as a special media access request to the SAN system 250, or it could access the media component 260 through such methods as data encapsulation over the SAN network 264. Once contacted, if the request was for retrieval or a restore, the media component 260 would collect the appropriate data and/or files and relay the retrieved data and/or files to the computing device 220 through a communication with the SAN system 250. This return communication could be in the form of a SAN communication of a network type file or data, or it could employ the use of data encapsulation or data bridging for the transmittal of the retrieved information.

If the request from the client component 222 is for archiving a file, block, or set of either of the two, the media component 260 could acknowledge the request either directly

through a SAN type message from the SAN system 250, or by encapsulating the response in a SAN type message. The client component 222 running on the computing device 220 would then direct the appropriate data or files from the memory media 214 to the media component 260. This again may take place either through a special access protocol recognizable by the SAN system 250 and redirected to the media component 260, or through encapsulating the data sent over the SAN link 264 from the computing device as a SAN-formatted message directed to the media component 260. It should be noted that the management component 202 running on a different computing device could also initiate a backup and retrieval request by the client component 222 through the network 270.

Turning now the computing device 230, the computing device 230 is running a client component 232 that manages its archiving needs. The computing device 230 is not in direct contact with the media component 260 operating on the library storage media 275. A request for an archival action such as retrieval, a restoration, or a backup is made by the client component 232. This request can be initiated either by the management component 202 or by the client component 232 itself. The client component 232 then coordinates and determines the scope of the backup and retrieval request, and accordingly acts to notify the media component 260. This may be accomplished either by a direct request to the SAN system 250 over the SAN link 264 acting as a request for a local backup and retrieval request, in which the SAN system 250 coordinates the backup and retrieval request. Or, this may be accomplished by the routing of a message directly for the media component 260 through use of data encapsulation via the SAN system 250.

If the request is a request for a backup, the client component 232 could then communicate the files and/or data to be archived to the media component 260 in a similar manner. The media component 260 would then perform the requested backup to the media library 275.

If the request is one for a retrieval or restoration, the media component 260 would extract the requested data from the media library 275 and route the data back to the client component 232 which would be responsible for the placement of the data on the computing system 230. This outbound messaging may be accomplished either by direct communication through the SAN system 250, or may be by indirect methods, such as data encapsulation from the media component 260 or the use of data bridging techniques.

Fig. 3 is schematic block diagram of the interaction of the library media of Fig. 2 with the SAN system. As shown, a library media 310 controlled by a media component 320 may comprise a number of different storage media, or may just comprise one. In Fig. 3, the library media 310 comprises a fast, alterable random access device 312, a fast, non-alterable random access device 314, a serial device 316, a slow, alterable random access device 318, and a slow, non-alterable random access device 319.

An example of the fast, alterable random access device 312 includes various magnetic media, such as a disc drive, that could include multiple writing surfaces. An example of the fast, non-alterable random access device 314 includes a multi disc optical system. An example of the slow, alterable random access device 318 includes jukeboxes containing disc drive cartridges. An example of the slow, non-alterable random access device 314 includes jukeboxes containing optical discs. An example of the serial device 316 could include a magnetic tape cartridge jukebox.

The media component 320 would control the placement of files, sectors, and other backup and retrieval information on the appropriate library media. This placement could be controlled according to the parameters of the backup, such as proximity in date, or whether the archived data is alterable in the archived form. Other parameters to consider could be the relative frequency of requests to the data or to importance of the data as determined by a client component or a management component directing those parameters.

Thus, in the case of differential backups, portions of the archived file may reside across several different media. Older portions may be contained in the device 314, while newer updated versions of that block may be contained in the device 312. Portions that have not changed may still be in other library devices.

In view of the above detailed description of the present invention and associated drawings, other modifications and variations will now become apparent to those skilled in the art. It should also be apparent that such other modifications and variations may be effected without departing from the spirit and scope of the present invention as set forth in this specification.

CLAIMS

- 1. A computer storage system comprising:
- a file processor to manage data transmission in the computer storage system, the file processor operating as part of a computing device;

a management component module and at least one client component on at least one other computing device that work in conjunction with the file processor for archival type requests.

- 2. The computer storage system of claim 1 wherein the archival type requests comprise backup requests such that at least one copy of a data is stored in a location other than an original location of the data.
- 3. The computer storage system of claim 1 wherein the archival type requests comprise retrieval requests that allows a data to be requested in the computer storage system for immediate access.
- 4. The computer storage system of claim 1 wherein the archival type requests comprise restoration requests that provide the storage system with the ability to restore a data to a selected state.
- 5. The computer storage system of claim 1 wherein the management component initiates a full backup of the storage system as stored and managed on a storage area network (SAN) system.
- 6. The computer storage system of claim 1 further comprising a media component and a client component that manage functions associated with a backup of the computer storage system.
 - 7. A modular network storage system comprising:
- a file processor for directing functions associated with the archival of data over a network, the file processor being a part of a computing device;

a plurality of backup devices, each backup device having storage space for the archival of data;

a plurality of media components, each media component being a part of a computing device and being communicatively coupled to one or more of the plurality of the backup devices and the file processor for controlling the archival functions of the backup devices in accordance with the direction from the file processor;

a plurality of client components for generating archival type requests; and
wherein the file processor, in response to the archival type requests, provides direction
to the plurality of media components for directing the archival functions in accordance with
the archival type requests.

- 8. The modular network storage system of claim 7, further comprising:
- a management component, which is a part of a computing device, communicatively coupled to the file processor and the plurality of client devices for coordinating archival functions.
 - 9. The modular network storage system of claim 7, further comprising: a plurality of client devices; and

wherein each client component is communicatively coupled to one or more of the plurality of client devices and the file processor for communicating the archival type requests from the client devices to the file processor.

- 10. The modular network storage system of claim 9, wherein at least two of the plurality of client devices run different operating systems.
- 11. The modular network storage system of claim 7, wherein the archival type requests comprise backup requests such that at least one copy of data is stored in a location other than an original location of the data.

12. The modular network storage system of claim 7, wherein the archival type requests comprise retrieval requests that a lows data to be requested in the computer storage system for immediate access.

- 13. The modular network storage system of claim 7, wherein the archival type requests comprise restoration requests that provide the modular network storage system with the ability to restore data to a selected state.
 - 14. The modular network storage system of claim 9, further comprising:

a network storage media communicatively coupled to two or more of the plurality of client devices over the network and the plurality of backup devices;

wherein at least one client device includes a local storage media;

wherein the archival functions include reading data from the network storage media and writing the data to one of the plurality of backup devices; and

wherein the archival functions include reading data from the local storage media and writing the data to one of the plurality of backup devices.

15. A method for storing data over a network, comprising:

providing a file processor, communicatively coupled to at least one client component and a plurality of media components;

providing a plurality of backup devices, each backup device having physical storage space for performing archival functions;

coupling the plurality of media components communicatively with the plurality of backup devices, and with a file processor, wherein each of the media components controls the archival functions of one or more backup devices;

generating an archival type request, by the at least one of client component to the file processor; and

directing, by the file processor through the plurality of media components, the backup devices to perform an archival function, in accordance with the archival type request.

- 16. The method of claim 15, wherein at least two of the plurality of clients run different operating systems.
- 17. The method of claim 16, wherein the archival type requests comprise backup requests such that at least one copy of a data is stored in a location other than an original location of the data.
- 18. The modular network storage system of claim 16, wherein the archival type requests comprise retrieval requests that allows data to be requested in the computer storage system for immediate access.
- 19. The modular network storage system of claim 16, wherein the archival type requests comprise restoration requests that provide the modular network storage system with the ability to restore data to a selected state.

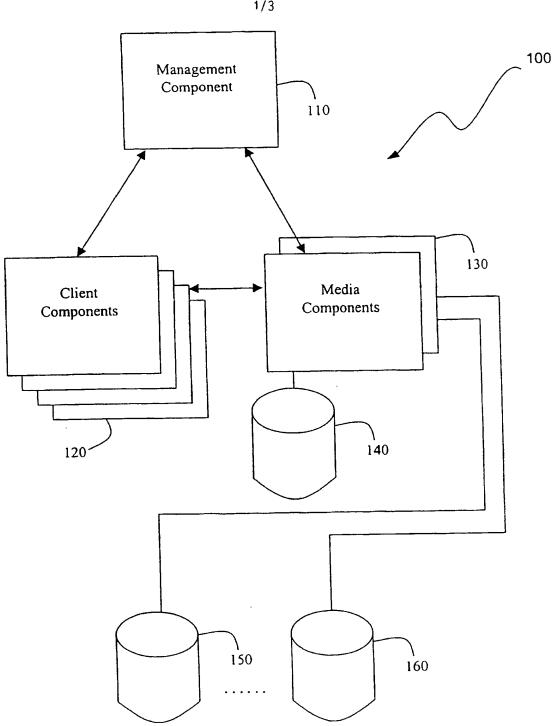


FIG. 1

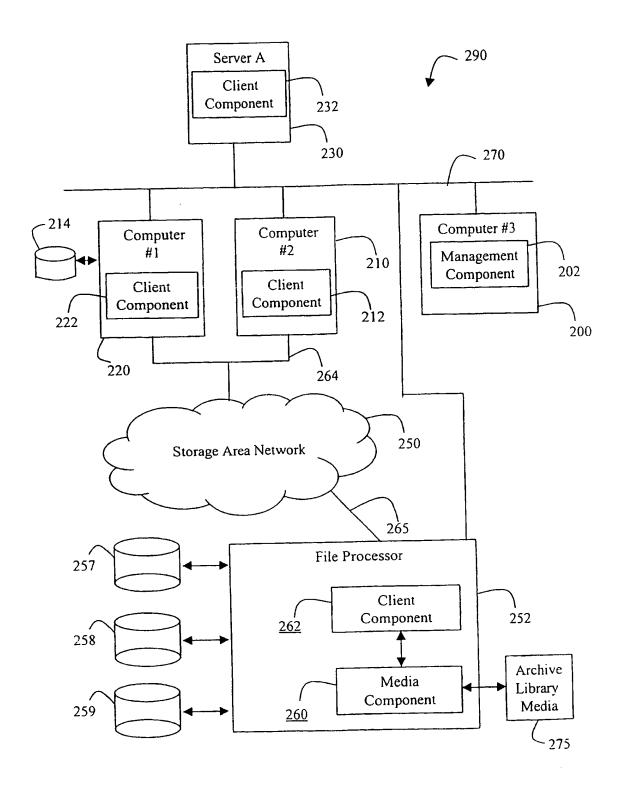


FIG. 2

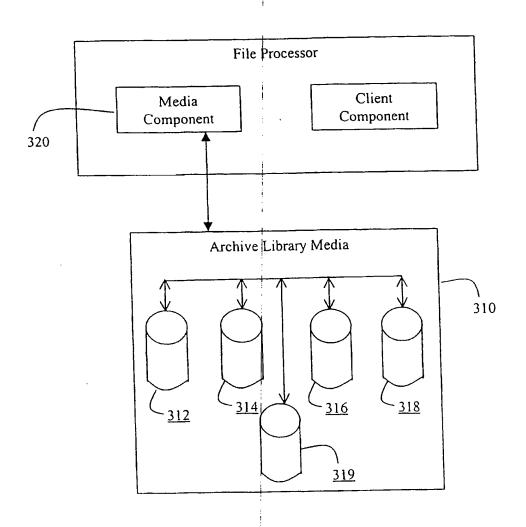


FIG. 3

INTERNATIONAL SEARCH REPORT

Internationa. plication No PCT/US 00/19364

A. CLASS	GO6F11/14				
According t	to International Patent Classification (IPC) or to both national clas	ssification and IPC			
	S SEARCHED				
	documentation searched (classification system followed by classification system)	fication symbols)			
IPC 7	G06F				
Documenta	ation searched other than minimum documentation to the extent t	that such documents are included in the fields s	earched		
Electronic	data base consulted during the international search (name of da	ta hase and where practical search lerms used	<u> </u>		
	nternal, IBM-TDB, COMPENDEX, PAJ,		,		
C. DOCUM	MENTS CONSIDERED TO BE RELEVANT				
Category °	Citation of document, with indication, where appropriate, of the	ne relevant passages	Relevant to claim No.		
X	WO 95 13580 A (ARCADA SOFTWARE 18 May 1995 (1995-05-18) the whole document)	1-6		
А	US 5 005 122 A (GRIFFIN ET AL. 2 April 1991 (1991-04-02) abstract)	1		
X	US 5 673 381 A (HUAI ET AL.) 30 September 1997 (1997-09-30) column 4, line 66 -column 6, l figures 1-6		7–19		
		-/ ·			
X Fu	urther documents are listed in the continuation of box C.	X Patent family members are listed	1 in annex.		
* Special categories of cited documents :		"T" later document published after the int or priority date and not in conflict with			
cons	ment defining the general state of the art which is not sidered to be of particular relevance	cited to understand the principle or Il invention	neory underlying the		
	er document but published on or after the international g date	"X" document of particular relevance; the cannot be considered novel or cannot	claimed invention of be considered to		
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another		involve an inventive step when the d "Y" document of particular relevance; the	ocument is taken alone		
citati	ion or other special reason (as specified) ment referring to an oral disclosure, use, exhibition or	cannot be considered to involve an induction document is combined with one or m	nventive step when the		
othe	er means	ments, such combination being obvid	ous to a person skilled		
later	ment published prior to the international filling date but rithan the priority date claimed	*8" document member of the same patent family			
Date of the	e actual completion of the international search	Date of mailing of the international se	earch report		
	13 December 2000	21/12/2000	21/12/2000		
Name and	d mailing address of the ISA European Patent Office, P.B. 5818 Patentiaan 2	Authorized officer			
	NL – 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl. Fax: (+31-70) 340-3016	Absalom, R	Absalom, R		

INTERNATIONAL SEARCH REPORT

PCT/US 00/19364

Category *	Citation of document, with indication where appropriate, of the relevant passages	Relevant to claim No.
		1~19
A	LUIS-FELIPE CABRERA ET AL: "ADSM: A MULTI-PLATFORM, SCALABLE, BACKUP AND ARCHIVE MASS STORAGE SYSTEM"	1 19
	DIGEST OF PAPERS OF THE COMPUTER SOCIETY	
	COMPUTER CONFERENCE (SPRING) COMPCON,US,LOS ALAMITOS, IEEE COMP. SOC.	
	PRESS, vol. CONF. 40, 5 March 1995 (1995-03-05),	
	pages 420-427, XP000545451	
	ISBN: 0-7803-2657-1 the whole document	
A	JANDER M: "LAUNCHING STORAGE-AREA NET"	
	DATA COMMUNICATIONS, US, MCGRAW HILL. NEW YORK,	
	vol. 27, no. 4, 21 March 1998 (1998-03-21), pages 64-72,	
	XP000740968 ISSN: 0363-6399	
_		
Α	EP 0 809 184 A (IBM) 26 November 1997 (1997-11-26)	
Α	EP 0 899 662 A (HEWLETT PACKARD CO)	
	3 March 1999 (1999-03-03)	

INTERNATIONAL SEARCH REPORT

Information on patent family members

Internationa. plication No PCT/US 00/19364

Patent document cited in search report	:	Publication date	Patent family member(s)	Publication date
WO 9513580	A	18-05-1995	EP 0728333 A JP 9509768 T US 6038379 A	28-08-1996 30-09-1997 14-03-2000
US 5005122	Α	02-04-1991	NONE	
US 5673381	Α	30-09-1997	NONE	
EP 0809184	Α	26-11-1997	JP 10074168 A US 6148412 A	17-03-1998 14-11-2000
EP 0899662	Α	03-03-1999	EP 1008048 A WO 9912098 A	14-06-2000 11-03-1999

This Page is Inserted by IFW Indexing and Scanning Operations and is not part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ BLACK BORDERS
☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
FADED TEXT OR DRAWING
☑ BLURRED OR ILLEGIBLE TEXT OR DRAWING
☐ SKEWED/SLANTED IMAGES
☑ COLOR OR BLACK AND WHITE PHOTOGRAPHS
☐ GRAY SCALE DOCUMENTS
LINES OR MARKS ON ORIGINAL DOCUMENT
☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
□ OTHER:

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.